



Cut protection

# KRYTECH 558

Low risk - ISO B



CUT PROTECTION  
**LEVEL B**

EN388



4343B

CAT.2



DEXTERITY  
EN 420:

5/5

ISO 13997:

5.3 N

Standard protection for intricate handling in reasonably clean environments

## SPECIFIC ADVANTAGES



### Cut protection

- A long cuff for a better protection of the forearm



### Comfort

- Excellent dexterity and optimized shape to reduce fatigue.



### Durability

- Suitable for long-term wear : excellent abrasion resistance
- A reinforced welt in nitrile for an improved durability for the most exposed areas



### Skin protection

- Contains traces of DMF in compliance with occupational exposure limits

## INDUSTRIES

- Automotive/mechanical industry
- Construction Industry (Carpenters/Joiners)
- Construction Industry (Metalworkers/Locksmiths)

## APPLICATIONS

- Bodywork assembly
- Mechanical maintenance
- Installing steel structures
- Handling and installing metal structures




Cut protection

# KRYTECH 558

Low risk - ISO B

## LEGENDS

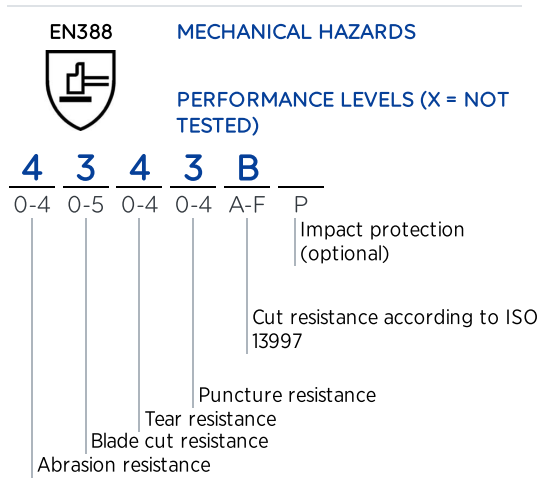

## PRODUCT DETAILS

Interior finish	Seamless textile support from HDPE fibres
Material	Polyurethane
Cuff characteristic	Long cuff
Colors of the gloves	Grey
Length (cm)	26-31
Size	6 7 8 9 10 11

## LOGISTIC DETAILS

Packaging	1 pair/bag 12 pairs/bag 96 pairs/carton
-----------	---

## LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/02/0612 - EXT 01/02/19
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE

Edit 05/05/2021