



Chemical protection

ULTRANITRIL 493

Prolonged contact (or immersion) | intermittent wear



CHEMICAL PROTECTION
TYPE A

Ultra-long chemical protection

SPECIFIC ADVANTAGES



Durability

- Longer service life: excellent mechanical resistance (abrasion, perforation)



Productivity

- Good grip on slippery objects, due to the embossed texture



Skin protection

- Excellent protection during intensive handling of high-risk chemical products



Guaranteed quality

- In compliance with guideline for requirements concerning personal protective equipment in plant protection according to BVL (Bundesamt für Verbraucherschutz und Lebensmittelsicherheit)
- Silicone free to prevent traces, defects on metal sheet and glass prior to painting

INDUSTRIES

- Automotive/mechanical industry
- Chemical industry
- Other industries
- Agriculture sector

APPLICATIONS

- Spray mixtures preparation
- Pesticides handling
- Tank filling
- Application & spreading of pesticides
- Pesticides waste management
- Treatment equipment cleaning
- Treating/degreasing metals with aggressive solvents
- Handling drums of chemical products
- Application of pesticides
- Cleaning of printing-press rollers



DEXTERITY
EN 420:
5/5





Chemical protection

ULTRANITRIL 493

Prolonged contact (or immersion) | intermittent wear


LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

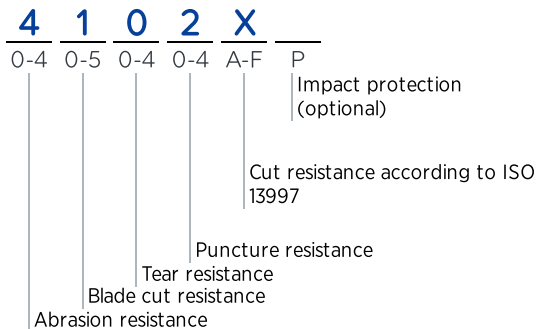

EN ISO 374-1
TYPE A

CHEMICAL RISKS



A: Methanol
J: n-Heptane
K: Sodium hydroxide 40%
O: Ammonia 25%
P: Hydrogen peroxide 30%
T: Formaldehyde 37%



PROTECTION FROM PESTICIDES

G2: Diluted & concentrated pesticides / Mechanical risk

ISO 18889

EN ISO 374-5

MICRO-ORGANISMS



Protection against bacteria and fungi

PRODUCT DETAILS

| | |
|--|------------------|
| Interior finish | Flocked |
| Exterior finish | Embossed texture |
| Material | Nitrile |
| Cuff characteristic | Straight cuff |
| Colors of the gloves | Green |
| Length (cm) | 39 |
| Thickness (mm) | 0.55 |
| Size | 8 9 10 11 |
| Surface resistance according to EN1149-1 (Value in palm area at 25% HR) | 8.3E+10 Ω |
| Vertical resistance according to EN1149-2 (Value in palm area at 25% HR) | 1.2E+10 Ω |

LOGISTIC DETAILS

| | |
|-----------|---|
| Packaging | 1 pair/bag 10 pairs/bag 50 pairs/carton |
|-----------|---|

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/12/15/1212
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France

Edit 05/05/2021

MAPA SAS capital de 35.000.010 €

420, rue d'Estienne d'Orves

92705 Colombes Cedex France

RCS Nanterre 314 307 720

mapa-pro.com

MAPA
PROFESSIONAL