



Chemical protection

# ALTO 299

Prolonged contact (or immersion) | intermittent wear

Good mechanical performance for long-lasting chemical protection

## SPECIFIC ADVANTAGES

### Durability

- Longer service life and good impact protection, due to the thickness of the material



CHEMICAL PROTECTION  
**TYPE A**



DEXTERITY  
EN 420:  
5/5

CAT.3  
**CE**  
0334

## INDUSTRIES

- Mechanical industry
- Construction Industry (Heating engineers/Plumbers)
- Other industries

## APPLICATIONS

- Emptying and cleaning septic tanks
- Maintenance in wet environments (water, oil, greases, hydrocarbons)
- Maintenance in wet environments



Chemical protection

# ALTO 299

Prolonged contact (or immersion) | intermittent wear


## LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

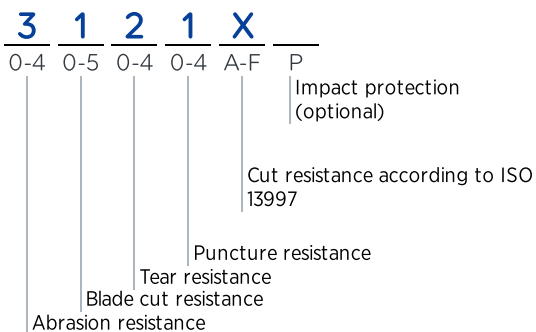

EN ISO 374-1

TYPE A



CHEMICAL RISKS

A: Methanol  
K: Sodium hydroxide 40%  
L: Sulphuric acid 96%  
M: Nitric acid 65%  
P: Hydrogen peroxide 30%  
T: Formaldehyde 37%

EN ISO 374-5



MICRO-ORGANISMS

Protection against bacteria and fungi

## PRODUCT DETAILS

Interior finish	Flocked
Exterior finish	Embossed texture
Material	Natural latex
Cuff characteristic	Straight cuff
Colors of the gloves	Orange
Length (cm)	31
Thickness (mm)	0.90
Size	7 8 9 10

## LOGISTIC DETAILS

Packaging	1 pair/bag 5 pairs/box 50 pairs/carton
-----------	--

## LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/126/09/18/2001
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France

Edit 05/05/2021