



Thermal protection

# TEMPCOOK 476

Temperature below 150°C | Wet environments



Hygienic combined with effective thermal protection; 100% fluid-proof

## SPECIFIC ADVANTAGES



### Thermal protection

- Thermal protection up to 250°C\* (\* from 150°C, the product can get stiffer and color change may happen, without degrading glove efficiency.)



### Durability

- Resistance to oils, greases and principal detergent products



### Food compliance

- The white/cream colour coding meets the catering industry clothing standards



### Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting

## INDUSTRIES

- Food industry
- Local Authorities (Catering Services)
- Catering industry
- Bakeries

## APPLICATIONS

- Pre-cooking
- Removing dishes from warming ovens
- Removing trays from ovens
- Removing hot dishes from dry or wet ovens
- Removing items from autoclaves and steam ovens

CHEMICAL PROTECTION  
**TYPE A**

CUT PROTECTION  
**LEVEL D**

EN388



4443D

EN ISO 374-1



TYPE A  
AFGJOT

EN ISO 374-5



EN 511:2006



111

EN407



X2XXXX

CATEGORY 3



0334

DEXTERITY

EN ISO 21420:  
1/5





Thermal protection

# TEMPCOOK 476

Temperature below 150°C | Wet environments


## LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

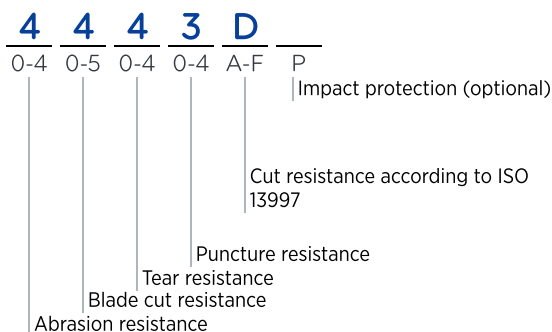


EN407

THERMAL RISKS (HEAT AND FIRE)



PERFORMANCE LEVELS (X = NOT TESTED)

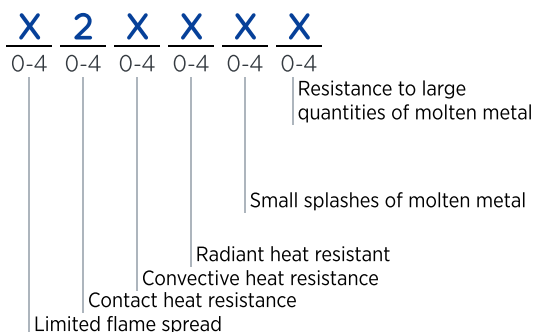


EN 511:2006

COLD HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)



EN ISO 374-1

CHEMICAL RISKS



TYPE A

A: Methanol  
 F: Toluene  
 G: Diethylamine  
 J: n-Heptane  
 O: Ammonia 25%  
 T: Formaldehyde 37%

EN ISO 374-5

MICRO-ORGANISMS



Protection against bacteria and fungi



FOOD CONTACT

French decree of 05/08/2020

## PRODUCT DETAILS

Interior finish	Knitted thermal protection
Exterior finish	Embossed texture
Material	Nitrile
Colour.s	White
Length (cm)	45
European sizes	7 9 10
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	1.6E+11 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	> 3E+13 Ω

## LOGISTIC DETAILS

Packaging	1 pair/bag 6 pairs/carton
-----------	------------------------------

## LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/04/19/1095
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE

Edit 29/07/2024