

# MAPA INGE TIME 405 E V 8 0 @H []] CE....



CHEMICAL PROTECTION TYPE B

EN ISO 374-1

TYPE B

KMT

EN388



2110X











VIRUS

EN ISO 374-5

DEXTERITY EN ISO 21420: 5/5

 User protection : hands protected against viruses & common aggressive chemicals • Surface protection : destruction of 99% viruses (ISO 21702:2019) & 99.99% bacteria (JIS Z 2801 standard)

SPECIFIC ADVANTAGES

**Protective Shield** 

## Comfort

bacteria

- good grip due to the non-slip embossing
- Tactile sensitivity, due to the gloves reduced thickness
- Cotton flocking provides added Comfort and perspiration absorption

**ALTO 405 ACTIVATED** 

Frequent contact | intermittent wear

Liquidproof glove, embbeding antimicrobial Pylote's technology, that limits cross contamination by viruses &

## Durability

the antimicrobial action lasts for the expected lifetime of the glove

## Additional benefits

- Optimised individual packaging format so as to limit plastic waste
- the biocidal active components are produced by green chemistry

# **INDUSTRIES**

- Automotive/mechanical industry
- Local Authorities (Cleaning)
- Health
  - Aeronautics industry
  - Other industries
  - Manufacturing
  - Horeca

## **APPLICATIONS**

- Common cleaning tasks in hospitals and clinics
- Work with composite materials (resins)
- Common cleaning tasks in public spaces
- Handling household detergents
- Handling aggressive chemical products
- Industrial cleaning, maintenance
- Spray-painting
- Common cleaning tasks in public establishments (hotels, restaurants, catering)

#### Edit 23/07/2024

MAPA SAS capital de 35.0<u>00.010 €</u> 420, rue d'Estienne d'Orves 92705 Colombes Cedex France RCS Nanterre 314 307 720




#### mapa-pro.com



# ALTO 405 ACTIVATED

Frequent contact | intermittent wear

# 

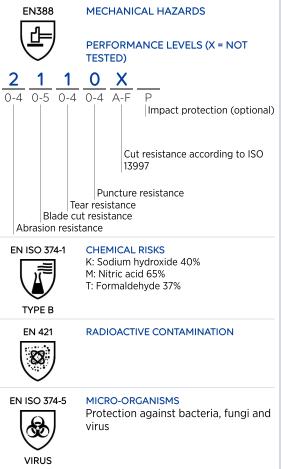

# PRODUCT DETAILS

Interior finish	Flocked
Exterior finish	Embossed texture
Material	Polychloroprene and natural latex
Cuff characteristic	Straight cuff
Colour.s	Blue Yellow
Length (cm)	33
Thickness (mm)	0.7
European sizes	6 7 8 9 10
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	7.8Ε+12 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	4.2E+12 Ω

# LOGISTIC DETAILS

	Packaging	1 pair/bag
	5 5	10 pairs/bag
and		100 pairs/carton

# LEGISLATION

- This product is not classified hazardous according to the regulation (EC)  $n^{0}1272/2008$  of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/05/18/0950
- Issued by the notified body nr: 0075 CTC 4, rue Hermann Frenkel 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 Asqual 14 rue des Reculettes -75013 Paris -France

#### Edit 23/07/2024

MAPA SAS capital de 35.000.010 € 420, rue d'Estienne d'Orves 92705 Colombes Cedex France RCS Nanterre 314 307 720

