



Chemical protection

ALTO 299

Prolonged contact (or immersion) | intermittent wear

Good mechanical performance for long-lasting chemical protection

SPECIFIC ADVANTAGES

Durability

- Longer service life and good impact protection, due to the thickness of the material

INDUSTRIES

- Mechanical industry
- Construction Industry (Heating engineers/Plumbers)
- Other industries

APPLICATIONS

- Emptying and cleaning septic tanks
- Maintenance in wet environments (water, oil, greases, hydrocarbons)
- Maintenance in wet environments



CHEMICAL PROTECTION
TYPE A



EN388

3121X

EN ISO 374-1



TYPE A
AKLMPT

EN ISO 374-5



CATEGORY 3



0334

DEXTERITY

EN420:
5/5




Chemical protection

ALTO 299

Prolonged contact (or immersion) | intermittent wear

LEGENDS

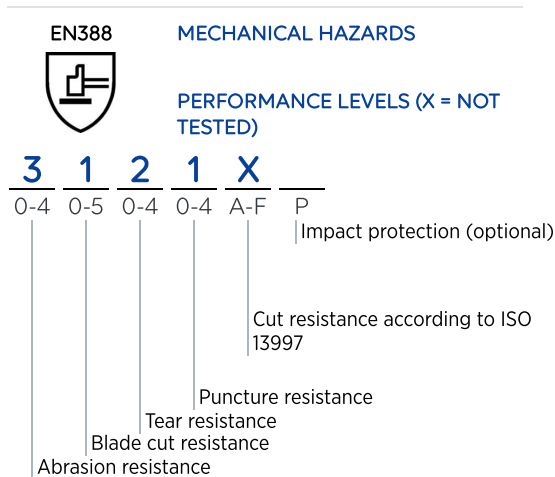

EN ISO 374-1 CHEMICAL RISKS

A: Methanol
K: Sodium hydroxide 40%
L: Sulphuric acid 96%
M: Nitric acid 65%
P: Hydrogen peroxide 30%
T: Formaldehyde 37%

TYPE A

EN ISO 374-5 MICRO-ORGANISMS

Protection against bacteria and fungi

PRODUCT DETAILS

Interior finish	Flocked
Exterior finish	Embossed texture
Material	Natural latex
Cuff characteristic	Straight cuff
Colour.s	Orange
Length (cm)	31
Thickness (mm)	0.9
European sizes	7 8 9 10

LOGISTIC DETAILS

Packaging	1 pair/bag 5 pairs/bag 50 pairs/carton
-----------	--

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/126/09/18/2001
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France