



Chemical protection

MUCAMBO PRO 280

Flocked

Precision dexterity in non-aggressive environments



KJEMISK BESKYTTELSE
TYPE B

EN388



1100X

EN ISO 374-1



TYPE B
KLMOP

SPESIFIKKE FORDELER



Comfort

- Excellent dexterity from the suppleness of natural latex
- Added comfort and absorption of perspiration, due to the cotton flock-lining



Durability

- Good resistance



Productivity

- Special Nitrile formulation provides excellent grip
- Palm to slip in high relief, increased grip and thickness

NÆRINGER

- Mechanical industry
- Local Authorities (Cleaning)
- Local Authorities (Waste Collection and Processing)
- Construction Industry (Masons / Plasterers)
- Construction Industry (Painters/Decorators)
- Other industries

APPLIKASJONER

- Preparing and pouring mortar and cement
- Plastering
- Painting
- Cleaning
- Preparing surfaces
- Applying finishes
- Assembly of small, oil and grease free parts
- Processing waste at a sorting center
- Handling household detergents
- Household waste collection



Chemical protection

MUCAMBO PRO 280

Flocked


LEGENDER

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

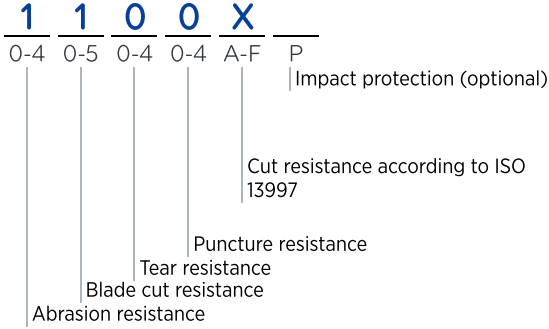

EN ISO 374-1

CHEMICAL RISKS



K: Sodium hydroxide 40%
 L: Sulphuric acid 96%
 M: Nitric acid 65%
 O: Ammonia 25%
 P: Hydrogen peroxide 30%

TYPE B

PRODUKT DETALJER

Interior finish	Flocked
Exterior finish	Non-slip grip
Material	Natural latex
Cuff characteristic	Straight cuff
Colour.s	Yellow
Length (cm)	29-31
Thickness (mm)	0.40 mm
European sizes	6 7 8 9

LOGISTISKE DETALJER

Packaging	1 pair/bag 10 pairs/bag 100 pairs/carton
-----------	--

LEGISLATION

Redigere 30/06/2023