



Thermal protection

TEMPTEC 332

Temperature above 150°C | Chemical environment




KJEMISK BESKYTTELSE
TYPE A



2212X



TYPE A
ACLMNS




111



X2XXXX



0334



EN 420:
5/5

Effective thermal insulation and resistance to a wide range of chemical

SPESIFIKKE FORDELER



Thermal protection

- Excellent thermal insulation, due to double-knit cotton



Productivity

- Good grip on slippery objects, due to the embossed texture



Skin protection

- Multi-purpose chemical resistance (acids, aliphatic solvents) increased by the thickness of the material



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting

NÆRINGER

- Mechanical industry
- Petrochemical industry
- Other industries
- Rubber industry

APPLIKASJONER

- Chemical treatment of metals
- Oil quenching of steel
- Sampling of hot petrochemical products
- Polymer extrusion
- Boiler room work
- Handling of hot piping
- Handling of moulds in the ceramic industry
- Manufacture of adhesives
- Manufacture of insulating electric wires
- Road works in cold conditions

Redigere 30/06/2023

MAPA SAS capital de 35.000.010 €
420, rue d'Estienne d'Orves
92705 Colombes Cedex France
RCS Nanterre 314 307 720

mapa-pro.com

MAPA
PROFESSIONAL



Thermal protection

TEMPTEC 332

Temperature above 150°C | Chemical environment


LEGENDER

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

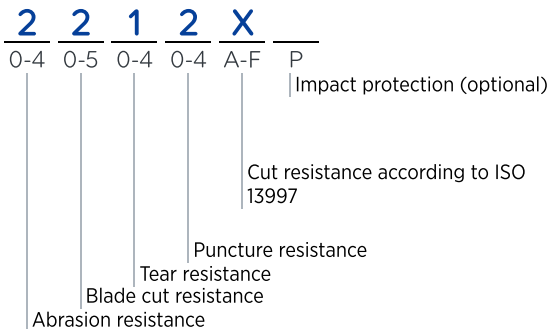


EN407

THERMAL RISKS (HEAT AND FIRE)



PERFORMANCE LEVELS (X = NOT TESTED)

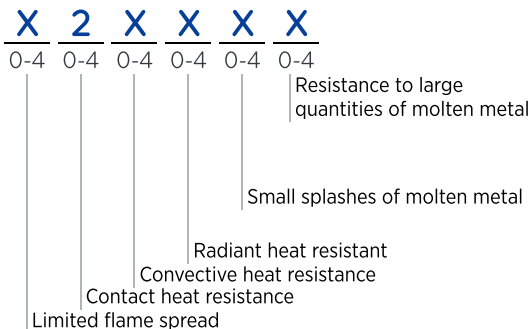


EN 511:2006
(Cold)

COLD HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)



EN ISO 374-1

CHEMICAL RISKS



TYPE A

A: Methanol
C: Acetonitrile
L: Sulphuric acid 96%
M: Nitric acid 65%
N: Acetic acid 99%
S: Hydrofluoric acid 40%

PRODUKT DETALJER

| | |
|---|----------------------------|
| Interior finish | Knitted thermal protection |
| Exterior finish | Pebbled |
| Material | Polychloroprene |
| Colour.s | Black Blue |
| Length (cm) | 36 |
| European sizes | 8 9 10 |
| Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity) | 2.6E+11 Ω |
| Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity) | 1.6E+11 Ω |

LOGISTISKE DETALJER

| | |
|-----------|------------------------------|
| Packaging | 1 pair/bag 6 pairs/carton |
|-----------|------------------------------|

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/05/19/1646
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France