



Chemical protection

ALTO 298

Prolonged contact (or immersion) | short wear



CHEMICAL PROTECTION
TYPE A

EN 388



2131X

EN 374-1



Type A
AKLMPT

EN 374-5



CATEGORY 3

Dexterity EN ISO
21420: 5/5



0334

Good mechanical performance for long-lasting chemical protection

SPECIFIC ADVANTAGES



Durability

- Longer service life and good impact protection, due to the thickness of the material



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting



Additional benefits

- Longer length provides forearm protection

INDUSTRIES

- Metallurgy

APPLICATIONS

- Maintenance in wet environments (water, oil, greases, hydrocarbons)



Chemical protection

ALTO 298

Prolonged contact (or immersion) | short wear


LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

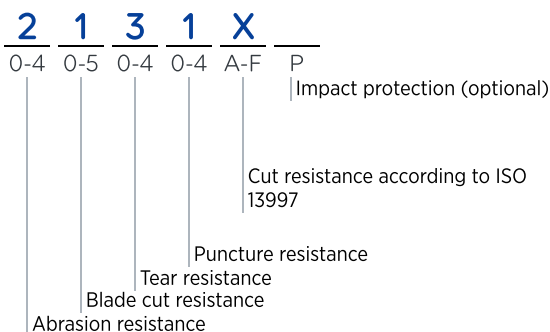

EN ISO 374-1

CHEMICAL RISKS



TYPE A

A: Methanol
K: Sodium hydroxide 40%
L: Sulphuric acid 96%
M: Nitric acid 65%
P: Hydrogen peroxide 30%
T: Formaldehyde 37%

EN ISO 374-5

MICRO-ORGANISMS



Protection against bacteria and fungi

PRODUCT DETAILS

Interior finish	Chlorinated
Exterior finish	Smooth
Material	Natural latex
Cuff characteristic	Feston Cuff
Colour	Blue
Length (cm)	43
Thickness (mm)	1.05
Sizes	8 9 10

LOGISTIC DETAILS

Packaging	1 pair/bag 5 pairs/bag 50 pairs/carton
-----------	--

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/08/18/1704
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France