



Cut protection

KRYTECH 563

Low risk - ISO B



CUT PROTECTION
LEVEL B

EN 388



4X43B

ISO 13997
5.9 N (601 g)

Dexterity EN ISO
21420: 5/5

CATEGORY 2



Standard protection for intricate handling in dry and dirty environments

SPECIFIC ADVANTAGES



Durability

- Excellent life of duration thanks to an abrasion resistant coating
- Excellent resistance to greases



Skin protection

- Free of harmful substances: DMF Free



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting

INDUSTRIES

- Automotive industry
- Construction industry:
Metalworkers/Locksmiths
- Paper industry
- Local Authorities: Local
Authorities (Waste Collection
and Processing)

APPLICATIONS

- Mechanical maintenance
- Press work
- Handling sheet metal
- Handling cardboard and paper
- Waste collection




Cut protection

KRYTECH 563

Low risk - ISO B

LEGENDS

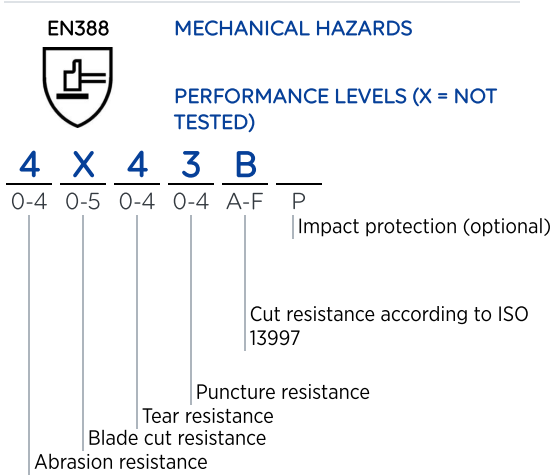

PRODUCT DETAILS

Interior finish	Seamless textile support from HDPE fibres
Gauge	13
Exterior finish	Ventilated back
Material	Nitrile
Cuff characteristic	Knitted Cuff
Colour	Black, Grey
Length (cm)	23-27
Sizes	7 8 9 10 11
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	3.9E+10 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	7.0E+10 Ω

LOGISTIC DETAILS

Packaging	1 pair/bag 12 pairs/box
-----------	----------------------------

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/08/18/1658 Update 01-20/02/2024
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE