



Cut protection

KRYTECH 609

Low risk - ISO B



CUT PROTECTION
LEVEL B

EN 388



4X42B

ISO 13997
9.5 N (968 g)

Dexterity EN ISO
21420: 5/5

CATEGORY 2



Level B cut resistant gloves. Enhanced durability combined with a high suppleness thanks to the HDPE liner. Touchscreen ability.

SPECIFIC ADVANTAGES



Comfort

- Ergonomic to reduce fatigue in the hand
- Added comfort and flexibility



Durability

- Excellent resistance to greases
- Excellent resistance to abrasion



Skin protection

- Contains traces of DMF in compliance with occupational exposure limits
- Free of harmful substances: OEKO-TEX® STANDARD 100



Suitable for touchscreen

- Can be used with touch devices & touch screen (thumb & index)



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting



Washability

- Washable up to 5 times at 40°C , allowing to extend glove lifespan, reduce costs and waste.



Care for the environment

- Optimised individual packaging to limit plastic waste

INDUSTRIES

- Automotive industry
- Construction industry: Carpenters/Joiners
- Construction industry: Roofers/Tilers/Glazers
- Construction industry: Heating engineers/Plumbers
- Paper industry
- Logistics
- Mining industry
- Metallurgy
- Food industry

APPLICATIONS

- Handling and sorting small, sharp parts
- Handling sheet metal
- Installing steel structures
- Laying tiles, inserts, frames or zinc sheeting
- Handling metal parts
- Handling cardboard and paper
- Goods handling on loading bays, docks, warehousing etc.
- Operating handling equipment
- Order preparation
- Mechanical maintenance




Cut protection

KRYTECH 609

Low risk - ISO B

LEGENDS

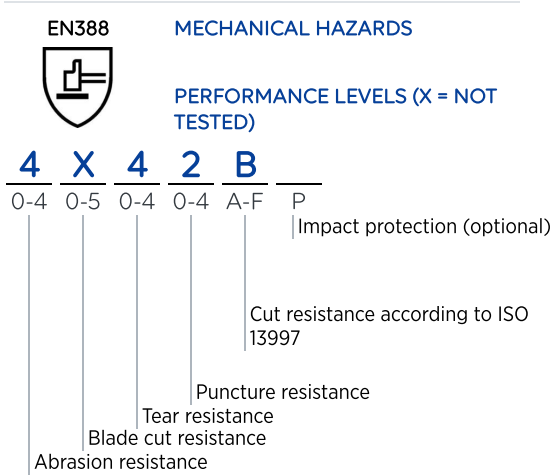

PRODUCT DETAILS

Interior finish	Seamless textile support from HDPE fibres
Gauge	13
Exterior finish	Ventilated back
Material	Polyurethane
Cuff characteristic	Knitted Cuff
Colour	Black
Length (cm)	21-27
Sizes	5 6 7 8 9 10 11
**Life Cycle Analysis (kg CO2eq)	0.46

**Calculated according to the European PEF methodology (EF 3.1), in accordance with ISO 14040 and ISO 14044. Cradle-to-grave scope, excluding the use phase. LCA data extracted in September 2026. Calculated on the standard reference.

LOGISTIC DETAILS

Packaging	1 pair/bag 12 pairs/bag 48 pairs/carton
-----------	---

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/01/22/0144 EXT 01/01/22
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE