



Cut protection

KRYTECH 644

High risk - ISO D



RESICOMFORT
TECHNOLOGY

CUT PROTECTION
LEVEL D



ISO 13997
16 N (1631 g)



CATEGORY 2



Dexterity EN ISO
21420: 5/5

High cut protection with comfort, suppleness & breathability without any compromise durability

Can be used with touch devices & touch screen

SPECIFIC ADVANTAGES



Comfort

- A seamless plaited glove for a maximum comfort, dexterity and flexibility while providing optimal cut protection (Cut level ISO D)



Durability

- Extended use guaranteed by our exclusive process RESICOMFORT. Proven breathability, flexibility and durability of the coating.



Skin protection

- Free of harmful substances: OEKO-TEX® STANDARD 100, DMF Free
- Dermatologically approved



Suitable for touchscreen

- Can be used with touch devices & touch screen



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting



Washability

- Washable 1 time at 40°C



Practical

- Cut level easy to identify thanks to the marking on the back of the glove.

INDUSTRIES

- Automotive industry
- Construction industry: Carpenters/Joiners
- Glass industry
- Mining industry

APPLICATIONS

- Strip cutting / Plasma strip cutting
- Handling sheet metal
- Metal working
- Installing steel structures
- Handling glass sheets
- Maintenance with cut risk
- Mechanical maintenance
- Handling of thick metal sheets

Edit 04/09/2026

MAPA SAS capital de 35.000.010 €
420, rue d'Estienne d'Orves
92705 Colombes Cedex France
RCS Nanterre 314 307 720

mapa-pro.com

MAPA
PROFESSIONAL




Cut protection

KRYTECH 644

High risk - ISO D

LEGENDS

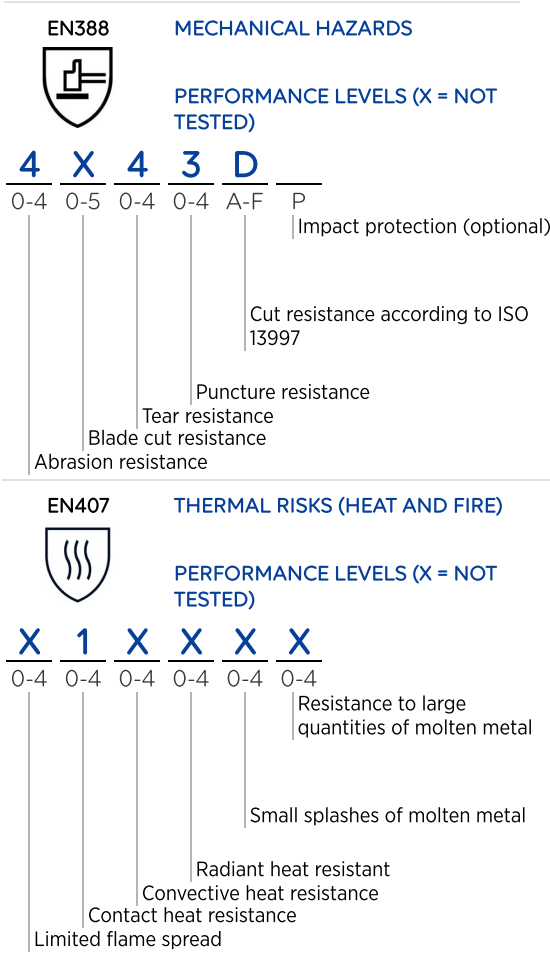

PRODUCT DETAILS

Interior finish	Seamless textile support from HDPE fibres
Gauge	15
Exterior finish	Ventilated back
Material	Nitrile foam sandy
Cuff characteristic	Knitted Cuff
Colour	Black, Grey
Length (cm)	23-28
Sizes	6 7 8 9 10 11
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	9.3E+9 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	4.7E+9 Ω

LOGISTIC DETAILS

Packaging	1 pair/bag 12 pairs/bag 48 pairs/carton
-----------	---

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/11/20/2738
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE