



Thermal protection

TEMP-DEX 745



CUT PROTECTION
LEVEL E

EN 388



4544E

EN 407



X2XXXX

ISO 13997
(2339 g)

Dexterity and resistance to cuts for optimized thermal protection

SPECIFIC ADVANTAGES



Cut protection

- Knitted aramide fibers ensures protection from cuts



Thermal protection

- Comfort and thermal protection.



Durability

- Longer service life: good abrasion resistance



Productivity

- Special nitrile Grip coating facilitates work in moderately oily environments



Skin protection

- Free of harmful substances: DMF Free



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting

INDUSTRIES

- Construction industry:
Heating engineers/Plumbers
- Rubber industry
- Ceramic and plastics industry
- Metallurgy

APPLICATIONS

- Maintaining pipes, heating equipment
- Vulcanization, demoulding, forming, etc.
- Handling of composite materials after heat processing
- Working with hot, sharp and oily parts



Thermal protection

TEMP-DEX 745


LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

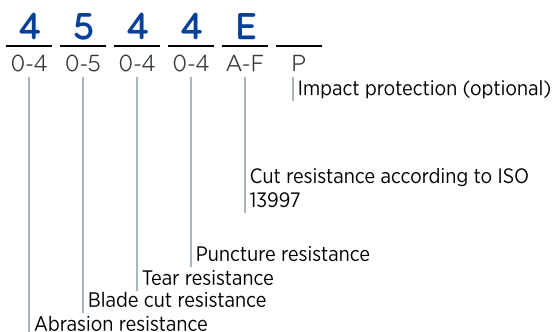


EN407

THERMAL RISKS (HEAT AND FIRE)



PERFORMANCE LEVELS (X = NOT TESTED)

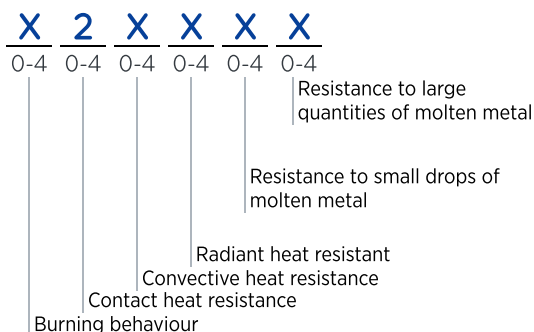

PRODUCT DETAILS

Interior finish	Knitted thermal protection
Exterior finish	Dots
Material	Nitrile
Cuff characteristic	Knitted Cuff
Colour	Blue
Length (cm)	24-28
Sizes	7 9 11

LOGISTIC DETAILS

Packaging	1 pair/bag 48 pairs/carton
-----------	-------------------------------

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).