



Chemical protection

ULTRANITRIL 493

Prolonged contact (or immersion) | intermittent wear



CHEMICAL PROTECTION
TYPE A

EN388



4102X

EN ISO 374-1



TYPE A
AJKOPT

EN ISO 374-5



CAT.CATEGORY 3

DEXTERITY



G2
ISO 18889



0334

EN 420:
5/5

Ultra-long chemical protection

SPECIFIC ADVANTAGES



Durability

- Longer service life: excellent mechanical resistance (abrasion, perforation)



Productivity

- Good grip on slippery objects, due to the embossed texture



Skin protection

- Excellent protection during intensive handling of high-risk chemical products



Guaranteed quality

- In compliance with guideline for requirements concerning personal protective equipment in plant protection according to BVL (Bundesamt für Verbraucherschutz und Lebensmittelsicherheit)
- Silicone free to prevent traces, defects on metal sheet and glass prior to painting

INDUSTRIES

- Automotive/mechanical industry
- Chemical industry
- Other industries
- Agriculture sector

APPLICATIONS

- Spray mixtures preparation
- Pesticides handling
- Tank filling
- Application & spreading of pesticides
- Pesticides waste management
- Treatment equipment cleaning
- Handling drums of chemical products
- Application of pesticides
- Cleaning of printing-press rollers
- Maintenance



Chemical protection

ULTRANITRIL 493

Prolonged contact (or immersion) | intermittent wear


LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

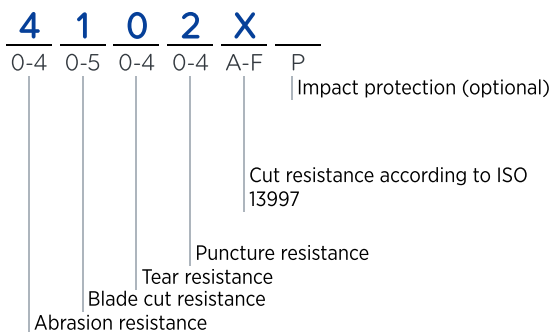

EN ISO 374-1

CHEMICAL RISKS



TYPE A

A: Methanol
J: n-Heptane
K: Sodium hydroxide 40%
O: Ammonia 25%
P: Hydrogen peroxide 30%
T: Formaldehyde 37%



ISO 18889

PROTECTION FROM PESTICIDES

G2: Diluted & concentrated pesticides / Mechanical risk

EN ISO 374-5

MICRO-ORGANISMS

Protection against bacteria and fungi



PRODUCT DETAILS

Interior finish	Flocked
Exterior finish	Embossed texture
Material	Nitrile
Cuff characteristic	Straight cuff
Colour.s	Green
Length (cm)	39
Thickness (mm)	0.55
European sizes	8 9 10 11
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	8.3E+10 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	1.2E+10 Ω

LOGISTIC DETAILS

Packaging	12 pairs/bag 48 pairs/carton
-----------	---------------------------------

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/12/15/1212
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France