



Chemical protection

ULTRANITRIL 495

Flocked | intermittent wear

The solution for safely handling fatty food products



CHEMICAL PROTECTION
TYPE A

EN388



3101X

EN ISO 374-1



TYPE A
AJKOPT

EN ISO 374-5



CAT.CATEGORY 3



0334

DEXTERITY

EN 420:
5/5



SPECIFIC ADVANTAGES



Comfort

- Excellent dexterity and comfort thanks to the anatomical form and the flocklined finish



Productivity

- Good grip due to the embossed texture



Skin protection

- Worn alone or as an outer-glove Recommended for persons sensitized to natural rubber proteins.



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting

INDUSTRIES

- Food industry

APPLICATIONS

- Cutting meat and fish
- Filleting Fish
- Food handling




Chemical protection

ULTRANITRIL 495

Flocked | intermittent wear

LEGENDS

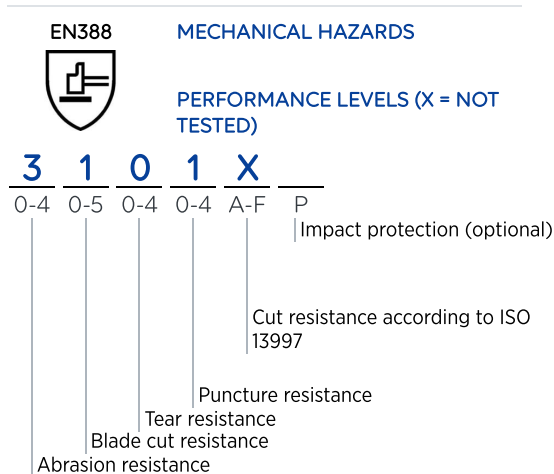

EN ISO 374-1 **CHEMICAL RISKS**

TYPE A

A: Methanol
 J: n-Heptane
 K: Sodium hydroxide 40%
 O: Ammonia 25%
 P: Hydrogen peroxide 30%
 T: Formaldehyde 37%

EN ISO 374-5 **MICRO-ORGANISMS**

Protection against bacteria and fungi



FOOD CONTACT
 French decree of 05/08/2020

PRODUCT DETAILS

Interior finish	Flocked
Exterior finish	Embossed texture
Material	Nitrile
Colour.s	Blue
Length (cm)	32
Thickness (mm)	0.41
European sizes	6 7 8 9 10

LOGISTIC DETAILS

Packaging	1 pair/bag 10 pairs/bag 100 pairs/carton
-----------	--

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/08/18/1648
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France

Edit 30/06/2023