



Handling protection

# ULTRANE 500

Grip and skin protection for oily environments.



**GRIP & PROOF**  
TECHNOLOGY



EN388

4121A



EN407

X1XXXX



GR

ISO 18889

CAT.CATEGORY 3

ISO 13997:

DEXTERITY



0075

5 N

EN 420:  
5/5



STANDARD  
100  
CQ 979/2  
IFTH

## SPECIFIC ADVANTAGES



### Durability

- Color adapted to dirty environments for a prolonged durability.
- Excellent abrasion resistance due to the nitrile coating



### Productivity

- Grip and Proof coating ensures an excellent grip in oily environment. It also reduces muscle strain and boost productivity



### Skin protection

- Oilproof, it repels oil penetration and reduce dermatitis
- Free of harmful substances: DMF Free



### Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting



### Washability

- Washable 3 times at 40° without any alteration on performances\* to extend lifespan, reduce costs and waste



### Additional benefits

- Available in vending machine packaging

## INDUSTRIES

- Automotive/mechanical industry
- Mechanical industry
- Other industries
- Glass industry
- Agriculture sector

## APPLICATIONS

- Maintenance in wet environments
- Handling and sorting small, sharp parts
- Handling oily mechanical parts
- Handling sheet metal
- Machining parts using cutting oil
- Cutting and stamping metal
- Maintenance in wet environments (water, oil, greases, hydrocarbons)
- Handling glass sheets
- Re-entry tasks



Handling protection

# ULTRANE 500


## LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

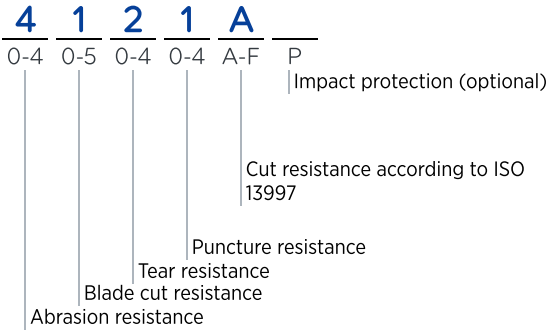


EN407

THERMAL RISKS (HEAT AND FIRE)



PERFORMANCE LEVELS (X = NOT TESTED)

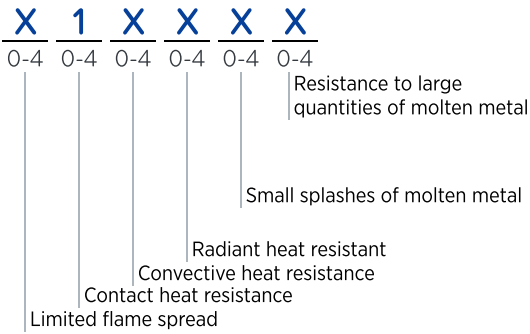

PROTECTION FROM PESTICIDES

GR: Re-entry tasks

ISO 18889

## PRODUCT DETAILS

Interior finish	Seamless textile support
Gauge	13
Exterior finish	Ventilated back
Material	Nitrile GRIP&PROOF coating
Cuff characteristic	Knitted Cuff
Colour.s	Black
European sizes	6 7 8 9 10 11
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	1.1E+10 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	4.4E+11 Ω

## LOGISTIC DETAILS

Packaging	1 pair/bag 12 pairs/bag 96 pairs/carton
-----------	---

## LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/09/18/1953
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0075 | CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE

\* Tests carried out on unworn gloves (i.e. in new condition) which differs from the reality in the field.

Edit 11/09/2023

