



Chemical protection

ULTRANITRIL 381

Frequent contact | ultra-comfort wear

Maximum comfort and chemical protection



CHEMICAL PROTECTION
TYPE A

EN388



3111A

EN ISO 374-1



TYPE A
JKLOPTA

EN ISO 374-5



EN407



X1XXXX



G2
ISO 18889

CAT.CATEGORY 3



0334

DEXTERITY

EN 420:
5/5

SPECIFIC ADVANTAGES



Thermal protection

- Added comfort and thermal insulation, due to the cotton-knit lining



Comfort

- Extremely supple, due to the unique Mapa multi-layer process



Productivity

- Good grip on slippery objects, due to the embossed texture



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting



Additional benefits

- Available in vending machine packaging

INDUSTRIES

- Automotive/mechanical industry
- Chemical industry
- Other industries
- Agriculture sector

APPLICATIONS

- Spray mixtures preparation
- Pesticides handling
- Tank filling
- Application & spreading of pesticides
- Pesticides waste management
- Treatment equipment cleaning
- Chemical product blending
- Handling drums of chemical products
- Manipulating valves
- Laboratory tests



Chemical protection

ULTRANITRIL 381

Frequent contact | ultra-comfort wear


LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

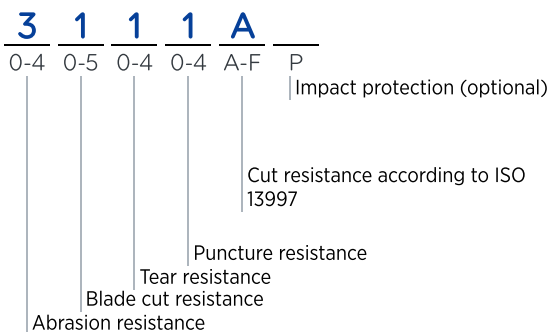


EN407

THERMAL RISKS (HEAT AND FIRE)



PERFORMANCE LEVELS (X = NOT TESTED)

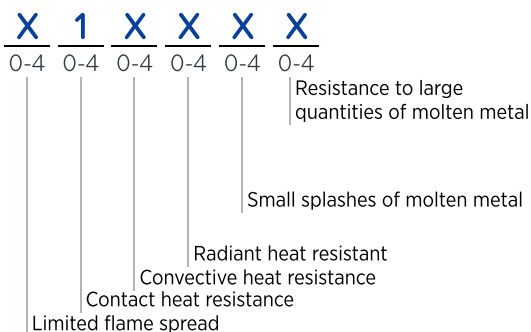

EN ISO 374-1

CHEMICAL RISKS



TYPE A

A: Methanol
J: n-Heptane
K: Sodium hydroxide 40%
L: Sulphuric acid 96%
O: Ammonia 25%
P: Hydrogen peroxide 30%
T: Formaldehyde 37%



G2

PROTECTION FROM PESTICIDES

G2: Diluted & concentrated pesticides / Mechanical risk

ISO 18889

EN ISO 374-5

MICRO-ORGANISMS



Protection against bacteria and fungi

PRODUCT DETAILS

Interior finish	Textile support Mapa Technology
Exterior finish	Embossed texture
Material	Nitrile
Cuff characteristic	Feston Cuff
Colour.s	Green
Length (cm)	36
Thickness (mm)	0.95
European sizes	7 8 9 10 11
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	7.6E+10 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	2.9E+10 Ω

LOGISTIC DETAILS

Packaging	12 pairs/bag 72 pairs/carton
-----------	---------------------------------

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/08/18/1663 updated 02-08/10/2021
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France

Edit 30/06/2023

MAPA SAS capital de 35.000.010 €

420, rue d'Estienne d'Orves

92705 Colombes Cedex France

RCS Nanterre 314 307 720

mapa-pro.com

MAPA
PROFESSIONAL