



Cut protection

KRYTECH 615

High risk - ISO D

High cut protection without any compromise on comfort and dexterity. Usable with touch screens.



CUT PROTECTION
LEVEL D

EN388



4X43D

CAT.CATEGORY 2



ISO 13997:

20 N



SPECIFIC ADVANTAGES



Cut protection

- High cut protection without any compromise on comfort, dexterity and breathability. Usable with touch screens.



Comfort

- A seamless plaited glove for very good fit, dexterity and flexibility.



Durability

- Optimal durability that offers better productivity and optimizes your costs



Suitable for touchscreen

- Can be used with touch devices & touch screen (thumb & index)



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting



Washability

- Washable up to 3 times at 60°C without any alteration on performances* allowing to extend glove lifespan, reduce costs and waste.



Practical

- Cut level easy to identify thanks to the marking on the back of the glove.

INDUSTRIES

- Automotive/mechanical industry
- Construction Industry (Carpenters/Joiners)
- Construction Industry (Metalworkers/Locksmiths)
- Glass industry
- Industrial equipment / Metal transformation
- Industrial maintenance

APPLICATIONS

- Handling and installing metal structures
- Assembly of thin metal sheets
- Cutting aluminium strips
- Handling sheet metal
- Metal working
- Installing steel structures
- Handling glass sheets
- Mechanical maintenance
- Maintenance with cut risk
- Handling of thick metal sheets



Cut protection

KRYTECH 615

High risk - ISO D


LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

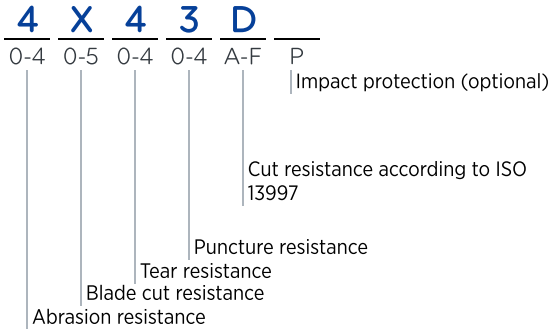

PRODUCT DETAILS

| | |
|---|---|
| Interior finish | Seamless textile support from HDPE fibres |
| Gauge | 13 |
| Exterior finish | Ventilated back |
| Material | Polyurethane |
| Cuff characteristic | Knitted Cuff |
| Colour.s | Black Grey |
| European sizes | 6 7 8 9 10 11 |
| Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity) | 1.0E+10 Ω |
| Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity) | 2.9E+9 Ω |

LOGISTIC DETAILS

| | |
|-----------|---|
| Packaging | 1 pair/bag 12 pairs/bag 48 pairs/carton |
|-----------|---|

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/04/18/0697
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE

