



Thermal protection

TEMPTEC 332

Temperature above 150°C | Chemical environment



CHEMICAL PROTECTION
TYPE A



EN388

2212X



EN ISO 374-1

TYPE A
ACLMNS



EN 511:2006
(COLD)

111



EN407


X2XXXX



CAT.CATEGORY 3

CE

0334



DEXTERITY

EN 420:
5/5

Effective thermal insulation and resistance to a wide range of chemical

SPECIFIC ADVANTAGES



Thermal protection

- Excellent thermal insulation, due to double-knit cotton



Productivity

- Good grip on slippery objects, due to the embossed texture



Skin protection

- Multi-purpose chemical resistance (acids, aliphatic solvents) increased by the thickness of the material



Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting

INDUSTRIES

- Mechanical industry
- Petrochemical industry
- Other industries
- Rubber industry

APPLICATIONS

- Chemical treatment of metals
- Oil quenching of steel
- Sampling of hot petrochemical products
- Polymer extrusion
- Boiler room work
- Handling of hot piping
- Handling of moulds in the ceramic industry
- Manufacture of adhesives
- Manufacture of insulating electric wires
- Road works in cold conditions



Thermal protection

TEMPTEC 332

Temperature above 150°C | Chemical environment


LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

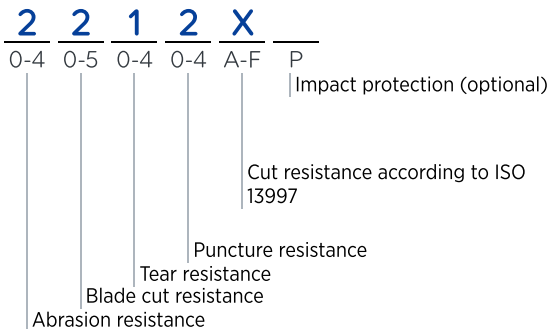


EN407

THERMAL RISKS (HEAT AND FIRE)



PERFORMANCE LEVELS (X = NOT TESTED)

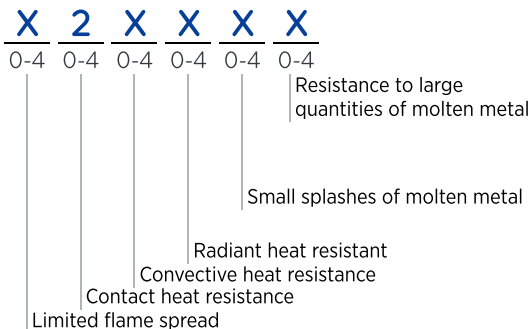


EN 511:2006
(Cold)

COLD HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)



EN ISO 374-1

CHEMICAL RISKS



TYPE A

A: Methanol
C: Acetonitrile
L: Sulphuric acid 96%
M: Nitric acid 65%
N: Acetic acid 99%
S: Hydrofluoric acid 40%

PRODUCT DETAILS

Interior finish	Knitted thermal protection
Exterior finish	Pebbled
Material	Polychloroprene
Colour.s	Black Blue
Length (cm)	36
European sizes	8 9 10
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	2.6E+11 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	1.6E+11 Ω

LOGISTIC DETAILS

Packaging	1 pair/bag 6 pairs/carton
-----------	------------------------------

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/05/19/1646
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France